


DFM09 END TRUCK

For single and double girder cranes

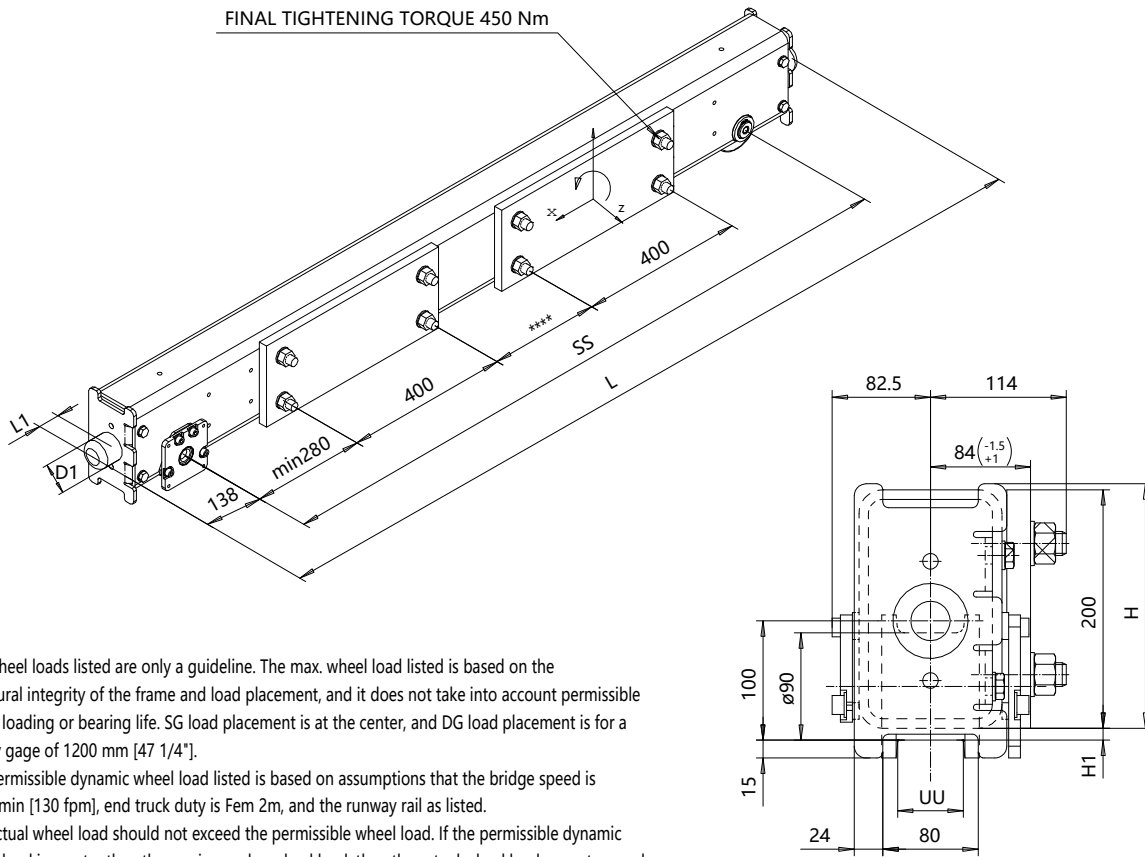

The wheel loads listed are only a guideline. The max. wheel load listed is based on the structural integrity of the frame and load placement, and it does not take into account permissible wheel loading or bearing life. SG load placement is at the center, and DG load placement is for a trolley gage of 1200 mm [47 1/4"].

The permissible dynamic wheel load listed is based on assumptions that the bridge speed is 40 m/min [130 fpm], end truck duty is Fem 2m, and the runway rail as listed.

The actual wheel load should not exceed the permissible wheel load. If the permissible dynamic wheel load is greater than the maximum dyn wheel load, then the actual wheel load cannot exceed maximum dyn wheel load.

Dynamic wheel = 1.15 x static wheel load

			SG		DG		Permissible dyn wheel load		
SS	H	H1	WT	Max dyn whl load	WT	Max dyn whl load	ASCE 30	ASCE 40	2" SQ BAR
[mm]	[mm]	[mm]	[kg]	[kN]	[kg]	[kN]	[kN]	[kN]	[kN]
1250	205	10	86	28	-	-	21.5	24.7	31.9
1600	205	10	99	28	116	28	21.5	24.7	31.9
2000	205	10	113	28	130	28	21.5	24.7	31.9
2500	205	10	132	28	149	28	21.5	24.7	31.9

$$L = SS + 276 + 2 \cdot L1$$

Available only with ductile iron wheel.

UU=50...70

End truck is compatible with the GES3 gear motor and can be equipped with a second gear motor when requested.

If the crane speed is faster, duty group is more severe, or the actual runway rail is narrower, then the max. allowable dynamic wheel load must be recalculated.

Suitable buffers		
Code	D1 [mm]	L1 [mm]
A	63	53
B	80	68
C	100	85
A, B, C: Rubber		

This document is the absolute property of Demag Crane & Components Corp.
This document must not be copied without the written permission of Demag Crane & Components Corp.
The contents thereof must not be disclosed to a third party nor be used for any unauthorized purpose. Contravention will be prosecuted.

ETTVRH Design		ETTVRH Chd	Appd	Ref Drawing	EBN09
2007-01-03 Date		END CARRIAGE			
SLEQDOCV Owner Dept		DFM09			Folder EBN09
		D004769-A			Issue 08/2025