



This document is the absolute property of Demag Cranes & Components Corp. This document must not be copied without the written permission of Demag Cranes & Components Corp. The contents thereof must not be disclosed to a third party nor be used for any unauthorized purpose. Contravention will be prosecuted.


DFM16 END TRUCK SIDE JOINT PLATE TYPE EBN

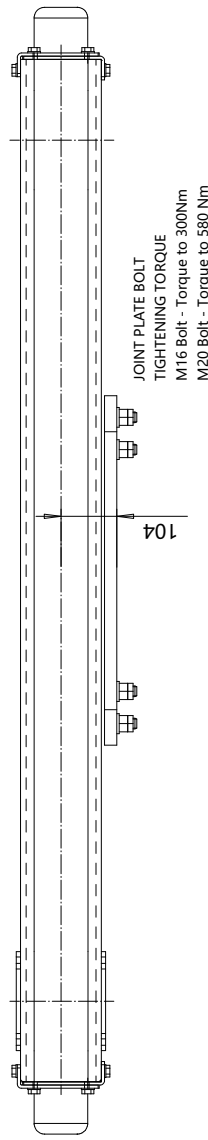

JOINT PLATE BOLT
TIGHTENING TORQUE
M16 Bolt - Torque to 300Nm
M20 Bolt - Torque to 580 Nm

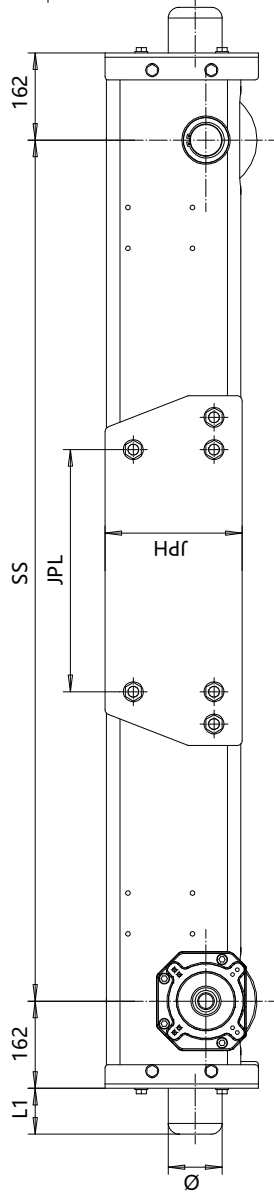

End view - without joint plate



UU = 54 mm - 84 mm

Joint plate	JPH (mm)	JPL (mm)	Min. Wheelbase (mm)
EBN16-350x255	255	350	1600; DG
EBN16-350x305	305	350	1600; DG
EBN16-450x255	255	450	2000; DG
EBN16-450x305	305	450	2000; DG

Buffer type	L1 (mm)	Ø (mm)
B	68	80
C	85	100
D	105	125
K	80	80
G	100	100
E	150	100
M	125	125
F	190	125
H	160+100	160
P	240+100	160
B, C, D rubber		
K, G, E, M, F, H, P polyurethane		

Wheelbase code	SS (mm)	H1 (mm)	Max. dyn whl load, (kN)	Permitted whl load, (kN)	Approx. Wgt / Trk (kg)
16	1600	268	SG 80	ASCE 40 50	SG 186
20	2000	268	80	50	209
25	2500	268	80	50	237
32; DG	3150	268	-	50	-
32; SG	3150	318	80	50	301
40	4000	318	63	50	357
45	4500	318	44	50	389

DEMAG

DFM16 END TRUCK

1 6
Folder
EBN16
Date
08/2025