
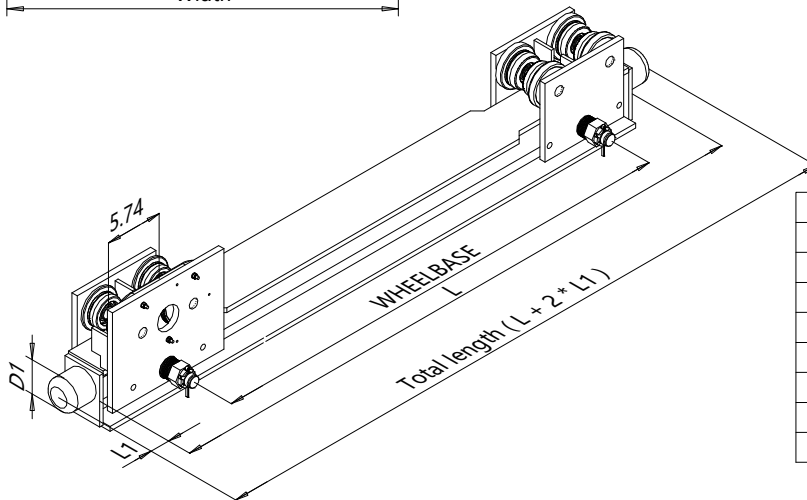


DHL08 UNDER RUNNING END TRUCK

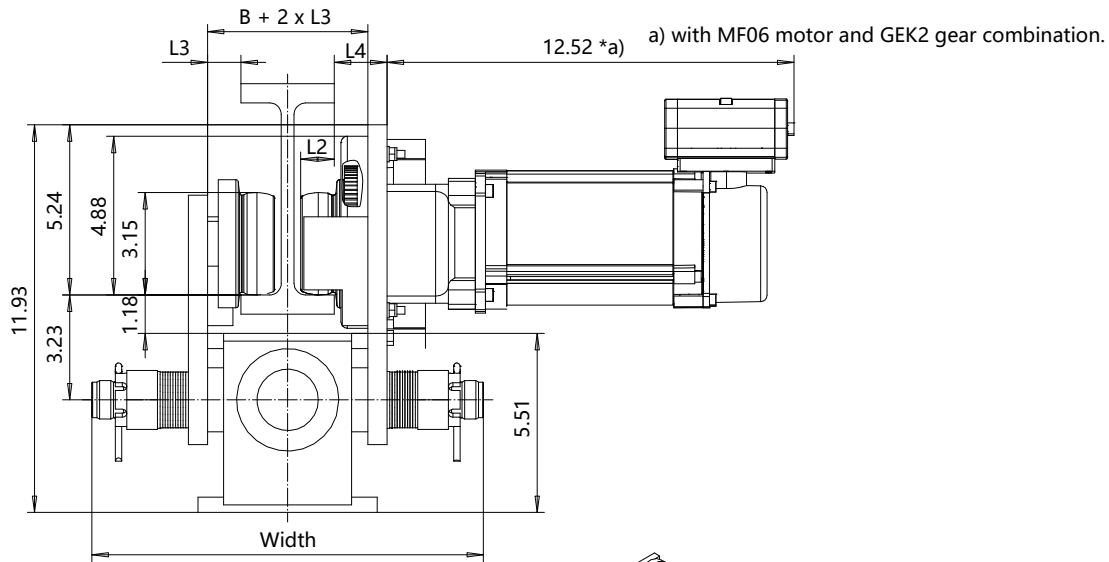

Suitable buffers		
Code	D1 [in]	L1 [in]
A	2.48	2.09
B	3.15	2.68
C	3.94	3.35
K	3.15	3.15
G	3.94	3.94
A, B, C: Rubber		
K, G: Polyurethane		

FLANGE RANGE (B) DIMENSIONS					
Wheels	B [in]	L2 [in]	L3 [in]	L4 [in]	Width [in]
Std	2.87...4.72	1.02	1.02	1.61	12.05
Std	4.76...6.61	1.02	1.02	1.61	13.94
Std	6.65...8.5	1.02	1.02	1.61	15.83
Std	8.54...10.39	1.02	1.02	1.61	17.72
Std	10.64...12.32	1.02	1.02	1.61	19.61
Patented	2.48...4.33	0.83	1.22	1.81	12.05
Patented	4.37...6.22	0.83	1.22	1.81	13.94

WHEELBASE [in] (mm)	Max dyn corner load [lb]	L [in]	Weight [lb]
47.24 (1200)	5625	60.24	243
55.12 (1400)	5625	68.11	258
70.87 (1800)	5625	83.86	289
90.55 (2300)	5175	103.54	326
110.23 (2800)	4500	123.23	364

This document is the absolute property of Demag Crane & Components Corp.
This document must not be copied without the written permission of Demag Crane & Components Corp.
The contents thereof must not be disclosed to a third party nor be used for any unauthorized purpose. Contravention will be prosecuted.

ETTAJA Design	Chd	Appd	Ref Drawing	UU08
2007-01-15 Date	END CARRIAGE			1 - 6.5
SLEGDOCV Owner Dept	DHL08			Folder UU/08
DEMAG	D004649-B			Issue 8/2025