


Double Girder - Medium, 2 PART SINGLE
Hoist type:
DHR10 2/1..EZ

SI

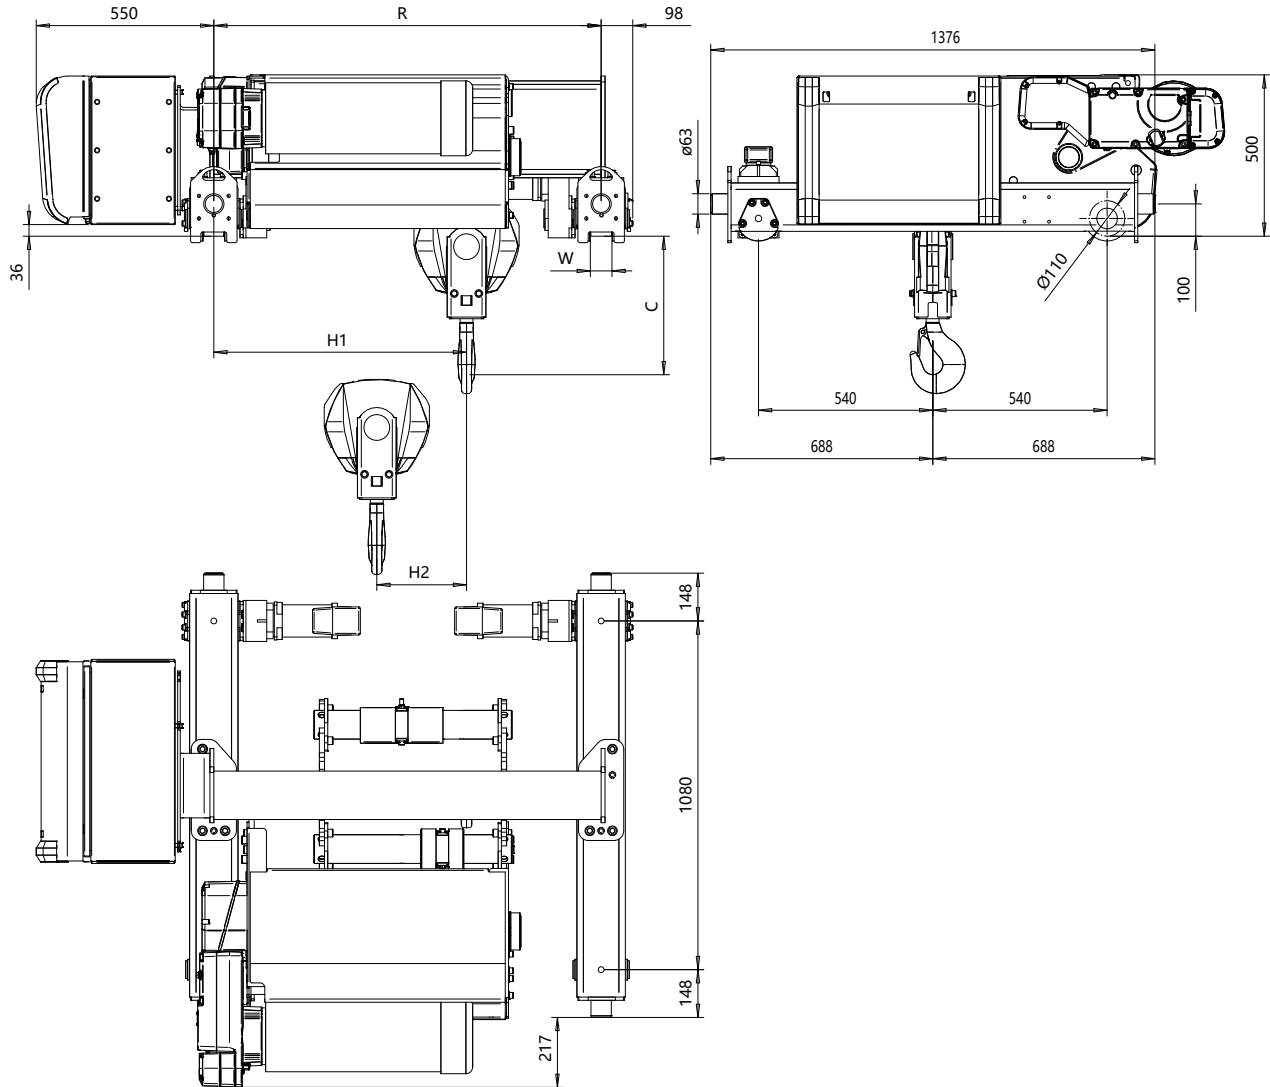

Headroom C-Dimension					Notes
Case 1	Case 2	Case 3	Case 4	Case 5	Case 1: Steel rope without HS22 limit switch
(mm)	(mm)	(mm)	(mm)	(mm)	Case 2: Steel rope with HS22 limit switch
430	430	430	430	430	Case 3: Steel rope with HS22 L.S. & Rope angle sensor
					Case 4: Synthetic rope and HS22 limit switch
					Case 5: Synthetic rope with HS22 L.S. & Rope angle sensor
					HS22 limit switch mandatory with synthetic rope

								Estimated weight *	
HOL	Length	H1	H2	WW min	WW max	R min	R max	R min	R max
(m)	code	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)	(kg)
18	C	783	278	52	82	1200	2000	685	719
24	D	958	368	52	82	1400	2000	718	744
30	E	1143	438	52	82	1700	2000	758	771
36	F	1328	565	52	82	2000	2000	797	797

Load	Class	Class
(kg)	Fem/ISO	ASME
4000	3m/M6	H4+
5000	2m/M5	H4
6300	1Am/M4	H3

* Estimated weight with P5 hoist motor
Standard rail gauges are 1200 mm, 1400 mm, 1700 mm, 2000 mm.
Dim H1 listed is based on R min.

Rev	Explanation	Date	Revised by	Checked by

This document is the absolute property of Demag Cranes & Components Corp. This document must not be copied without the written permission of Demag Cranes & Components Corp.
The contents thereof must not be disclosed to a third party nor be used for any unauthorized purpose. Contravention will be prosecuted.

Design	Chd	Appd	Ref Drawing	R10-M-02
Date	DOUBLE GIRDER HOIST			
SLEQMECE Owner Dept	2 PART SINGLE			
DEMAG				1:10
R10021_M				Folder
				Issue
				1