
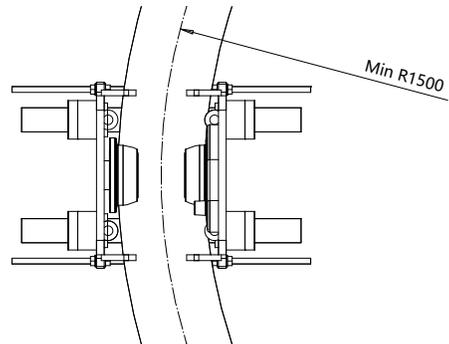
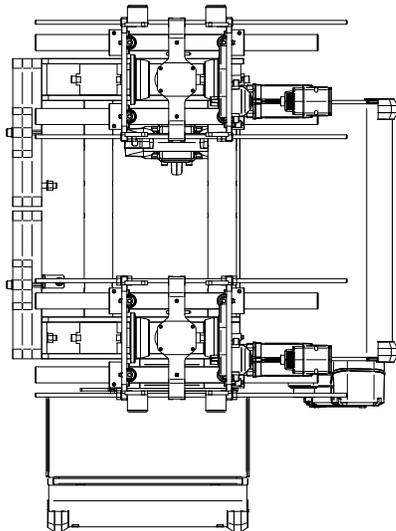
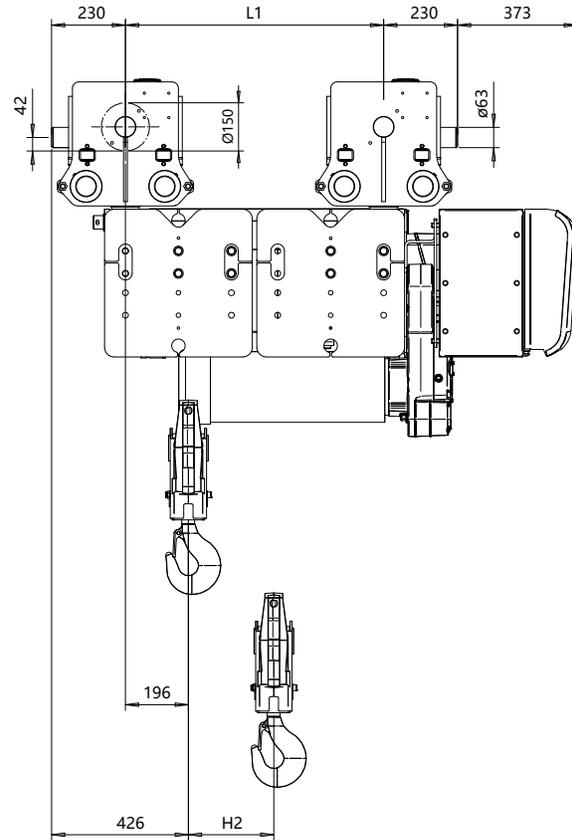


# Normal Headroom - Swivel Trolley for Curved Track, 2 PART SINGLE

## Hoist type:

SI

DHR10 2/1..EUD

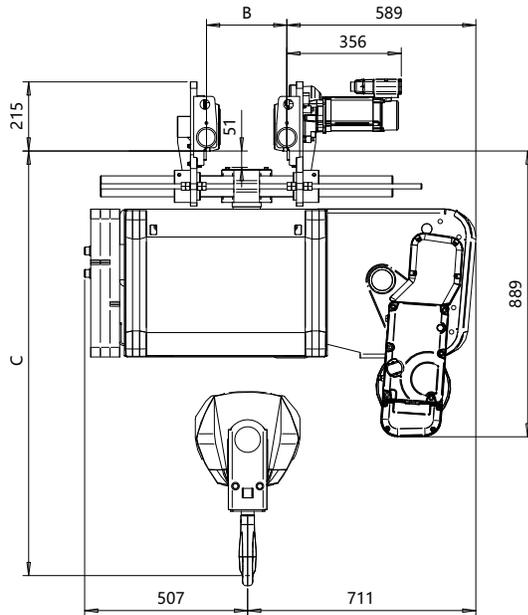

Flange Width	Headroom C-Dimension					
	B-dimension	Case 1	Case 2	Case 3	Case 4	Case 5
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
120 - 450	1095	1295	1340	1215	1280	
Case 1: Steel rope without HS22 limit switch						
Case 2: Steel rope with HS22 limit switch						
Case 3: Steel rope with HS22 L.S. & Rope angle sensor						
Case 4: Synthetic rope with HS22 limit switch						
Case 5: Synthetic rope with HS22 L.S. & Rope angle sensor						
HS22 limit switch mandatory with synthetic rope						

HOL	Length	H2	L1	Estimated weight
(m)	code	(mm)	(mm)	(kg)
18	C	266	804	1089
24	D	354	977	1134
30	E	443	1164	1179

Load (kg)	Class Fem/ISO	Class ASME
4000	3m/M6	H4+
5000	2m/M5	H4

Rev Explanation Date Revised by Checked by

This document is the absolute property of Demag Crane & Components Corp. This document must not be copied without the written permission of Demag Crane & Components Corp. The contents thereof must not be disclosed to a third party nor be used for any unauthorized purpose. Contravention will be prosecuted.

Design	Chd	Appd	Ref Drawing	R10-U-02
Date	NORMAL HEADROOM HOIST - SWIVEL TROLLEY			1:10
SLEOMECE Owner Dept	FOR CURVED TRACK			Folder
2 PART SINGLE				Issue
DEMAG R10021_U				2