
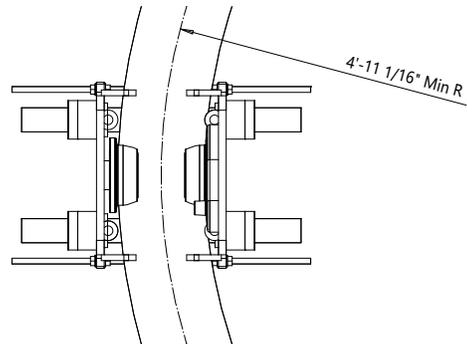
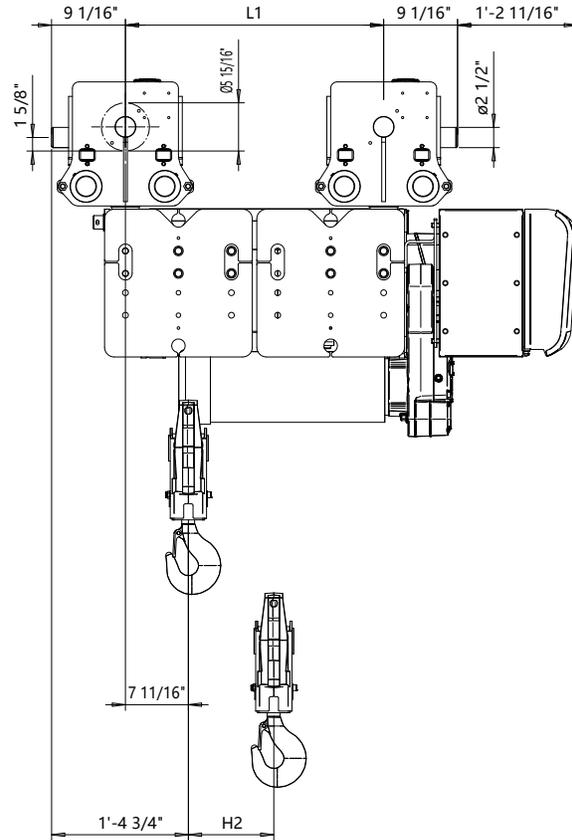
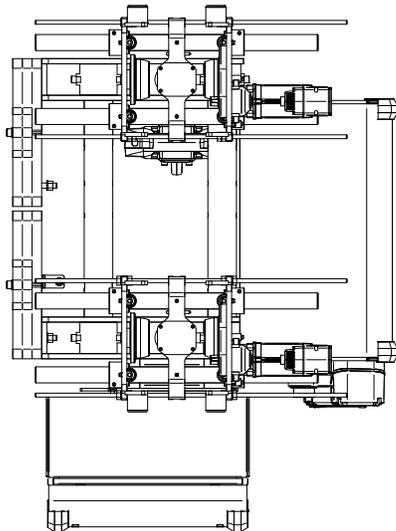


Normal Headroom - Swivel Trolley for Curved Track, 2 PART SINGLE

Hoist type:
DHR10 2/1..EUD

US-60Hz

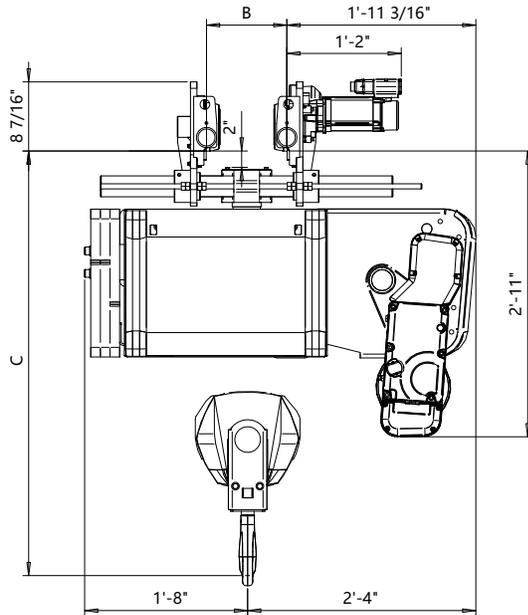

Flange Width B-dimension [inch]	Headroom C-Dimension				
	Case 1	Case 2	Case 3	Case 4	Case 5
4 3/4" - 17 3/4"	43 1/8"	51"	52 3/4"	47 7/8"	50 3/8"
Case 1: Steel rope without HS22 limit switch					
Case 2: Steel rope with HS22 limit switch					
Case 3: Steel rope with HS22 L.S. & Rope angle sensor					
Case 4: Synthetic rope with HS22 limit switch					
Case 5: Synthetic rope with HS22 L.S. & Rope angle sensor					
HS22 limit switch mandatory with synthetic rope					

HOL	Length	H2	L1	Estimated Weight
(ft-in)	code	(inch)	(inch)	(lb)
59'-0"	C	10 1/2"	2'-7 5/8"	2400
78'-8"	D	14"	3'-2 1/2"	2500
98'-5"	E	17 1/2"	3'-9 13/16"	2600

Load (ton)	Class ASME
4	H4+
5	H4

Rev Explanation Date Revised by Checked by

This document is the absolute property of Demag Crane & Components Corp. This document must not be copied without the written permission of Demag Crane & Components Corp. The contents thereof must not be disclosed to a third party nor be used for any unauthorized purpose. Contravention will be prosecuted.

Design	Chd	Appd	Ref Drawing	R10-U-02
Date	NORMAL HEADROOM HOIST - SWIVEL TROLLEY			1:10
SLEOMECE Owner Dept	FOR CURVED TRACK			Folder
2 PART SINGLE				Issue
R10021_U				2