


Double Girder - Medium, 2 PART DOUBLE
Hoist type:
DHR10 4/2..EZ

SI

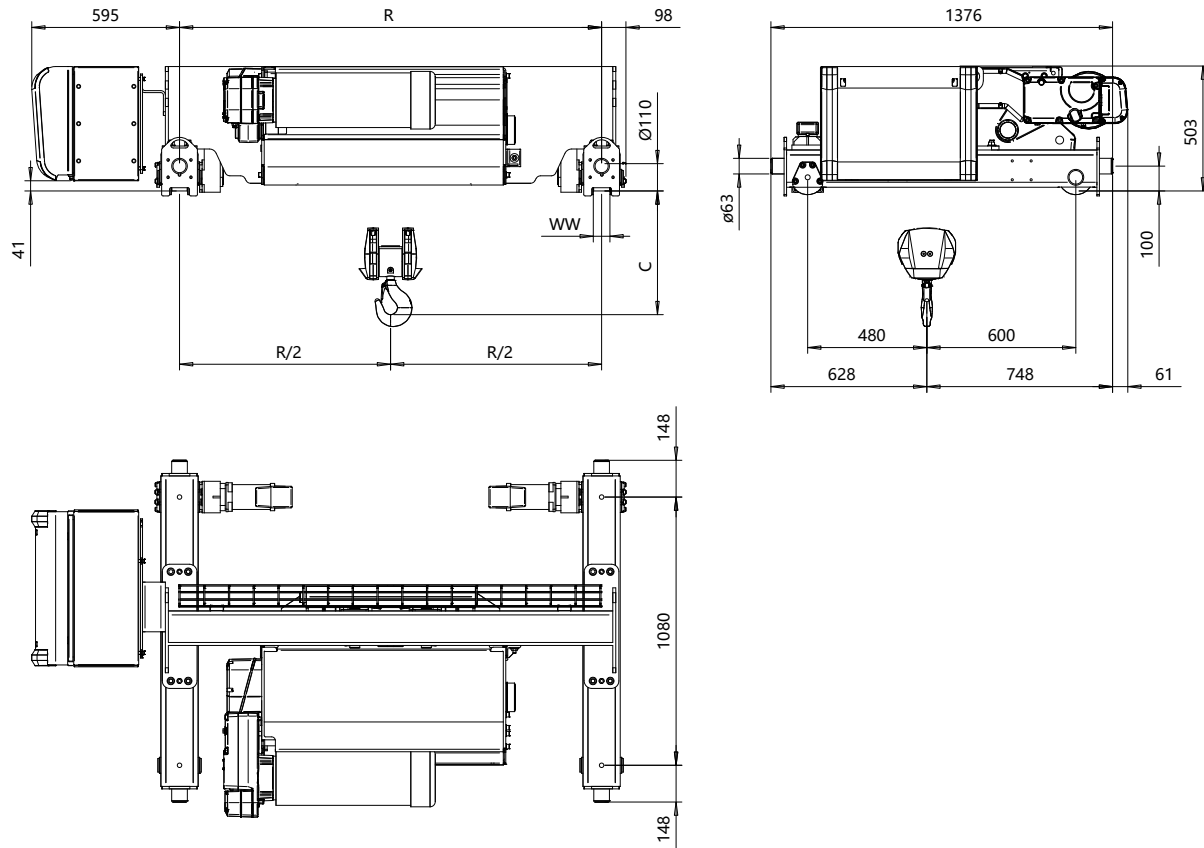

Headroom C-Dimension			Notes
Case 1	Case 2	Case 3	Case 1: Steel rope without HS22 limit switch
(mm)	(mm)	(mm)	Case 2: Steel rope with HS22 limit switch
498	508	563	Case 3: Steel rope with HS22 L.S. & Rope angle sensor

						Estimated weight *	
HOL	Length	WW min	WW max	R min	R max	R min	R max
(m)	code	(mm)	(mm)	(mm)	(mm)	(kg)	(kg)
13	D	52	82	1700	3100	771	903
18	E	52	82	1700	3100	807	934
22	F	52	82	2000	3100	862	971
29	G	52	82	2400	3100	934	1016
36	H	52	82	2400	3100	988	1070
43	J	52	82	2700	3100	1061	1120
53	K	52	82	3100	3100	1197	1197

Load	Class	Class
(kg)	Fem/ISO	ASME
4000	3m/M6	H4+
5000	2m/M5	H4

* Estimated weight with P5 hoist motor
Standard rail gauges are 1700 mm, 2000 mm, 2400 mm, 2700 mm, 3100 mm.
Default trolley gauge is R min.

Rev	Explanation	Date	Revised by	Checked by

This document is the absolute property of Demag Crane & Components Corp. This document must not be copied without the written permission of Demag Crane & Components Corp.
The contents thereof must not be disclosed to a third party nor be used for any unauthorized purpose. Contravention will be prosecuted.

Design	Chd	Appd	Ref Drawing	R10-M-22
Date	DOUBLE GIRDER HOIST			
SLEOMECE Owner Dept	2 PART DOUBLE			
DEMAG				Folder
R10022_M				Issue
				2

R10-M-22_1

2025-06-05

R10-M-22