


Double Girder - Medium, 2 PART DOUBLE
Hoist type:
DHR10 4/2..EZ

US-60Hz

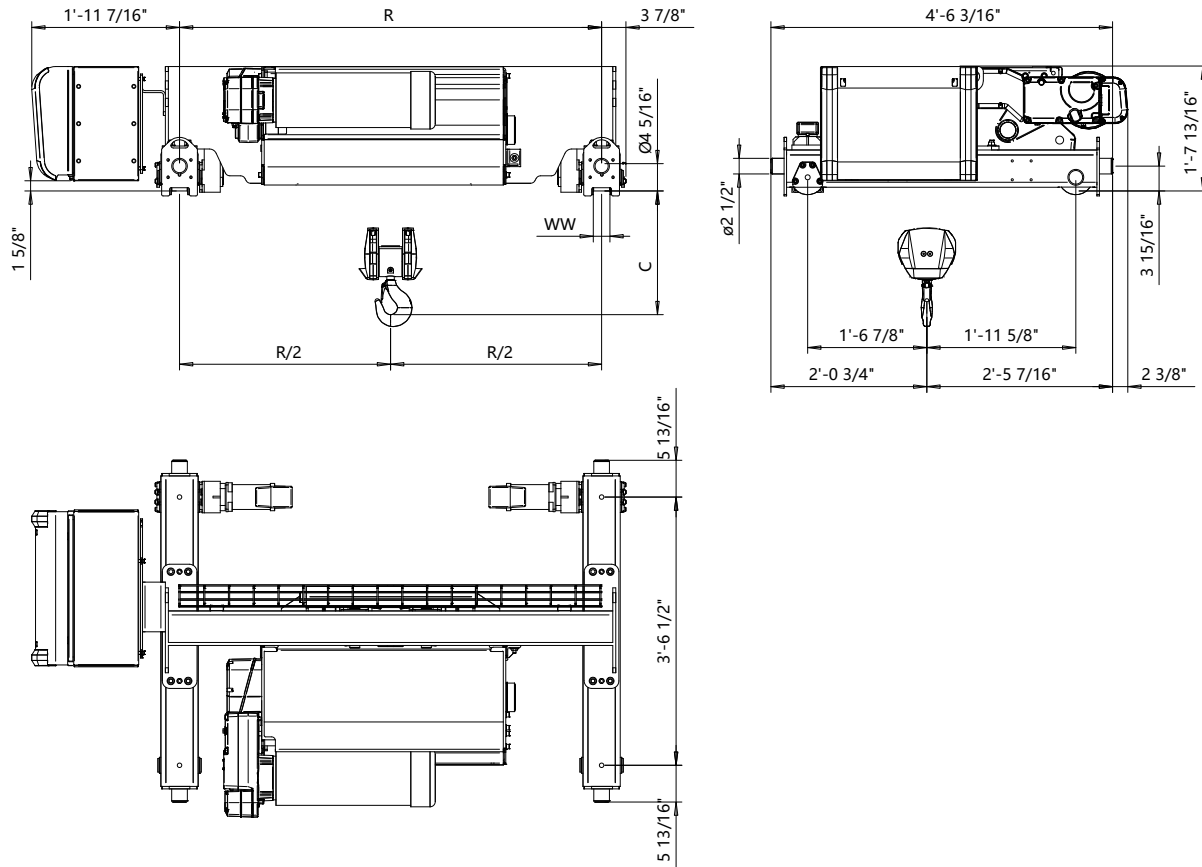

Headroom C-Dimension			Notes
Case 1 (inch)	Case 2 (inch)	Case 3 (inch)	Case 1: Steel rope without HS22 limit switch
19 5/8"	20"	22 1/4"	Case 2: Steel rope with HS22 limit switch
			Case 3: Steel rope with HS22 L.S. & Rope angle sensor

HOL (ft-in)	Length code	WW min	WW max	R min	R max	Estimated Weight *	
						R min (lb)	R max (lb)
42'-7"	D	2 1/16"	3 1/4"	5'-6 15/16"	10'-2 1/16"	1700	1990
59'-0"	E	2 1/16"	3 1/4"	5'-6 15/16"	10'-2 1/16"	1780	2060
72'-2"	F	2 1/16"	3 1/4"	6'-6 3/4"	10'-2 1/16"	1900	2140
95'-1"	G	2 1/16"	3 1/4"	7'-10 1/2"	10'-2 1/16"	2060	2240
118'-1"	H	2 1/16"	3 1/4"	7'-10 1/2"	10'-2 1/16"	2180	2360
141'-1"	J	2 1/16"	3 1/4"	8'-10 5/16"	10'-2 1/16"	2340	2470
173'-10"	K	2 1/16"	3 1/4"	10'-2 1/16"	10'-2 1/16"	2640	2640

* Estimated weight with P5 hoist motor
Standard rail gauges are 5'-6 15/16", 6'-6 3/4", 7'-10 1/2", 8'-10 5/16", 10'-2 1/16".
Default trolley gauge is R min.

Load (ton)	Class
4	H4+
5	H4

* Estimated weight with P5 hoist motor Standard rail gauges are 5'-6 15/16", 6'-6 3/4", 7'-10 1/2", 8'-10 5/16", 10'-2 1/16". Default trolley gauge is R min.					Design		Chd	Appd	Ref Drawing	R10-M-22				
					Date		DOUBLE GIRDER HOIST				 1:10 Folder			
Rev					Explanation		Date	Revised by	Checked by	SLEIGHMECE Owner Dept		2 PART DOUBLE		
This document is the absolute property of Demag Crane & Components Corp. This document must not be copied without the written permission of Demag Crane & Components Corp. The contents thereof must not be disclosed to a third party nor be used for any unauthorized purpose. Contravention will be prosecuted.													R10022 M	Issue 2

R10-M-22_1

2025-06-05

R10-M-22