
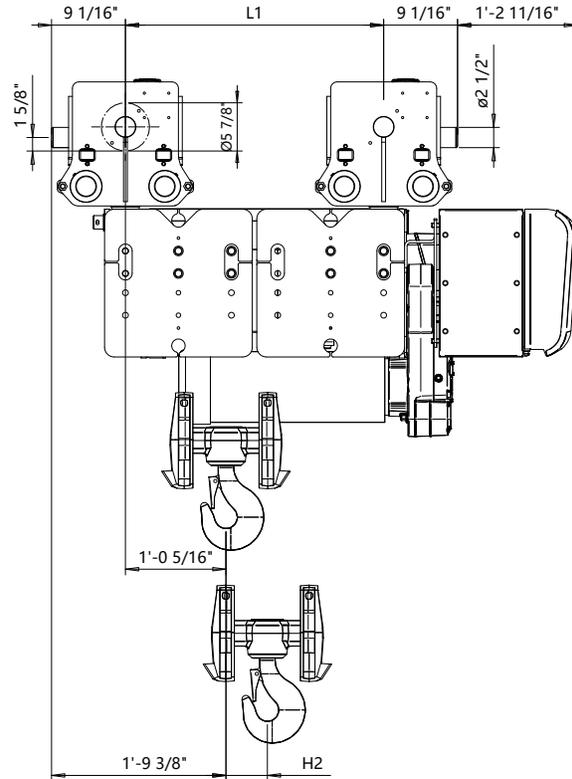


# Normal Headroom - for Straight Track, 4 PART SINGLE Hoist type:

US-60Hz

DHR10 4/1..EU

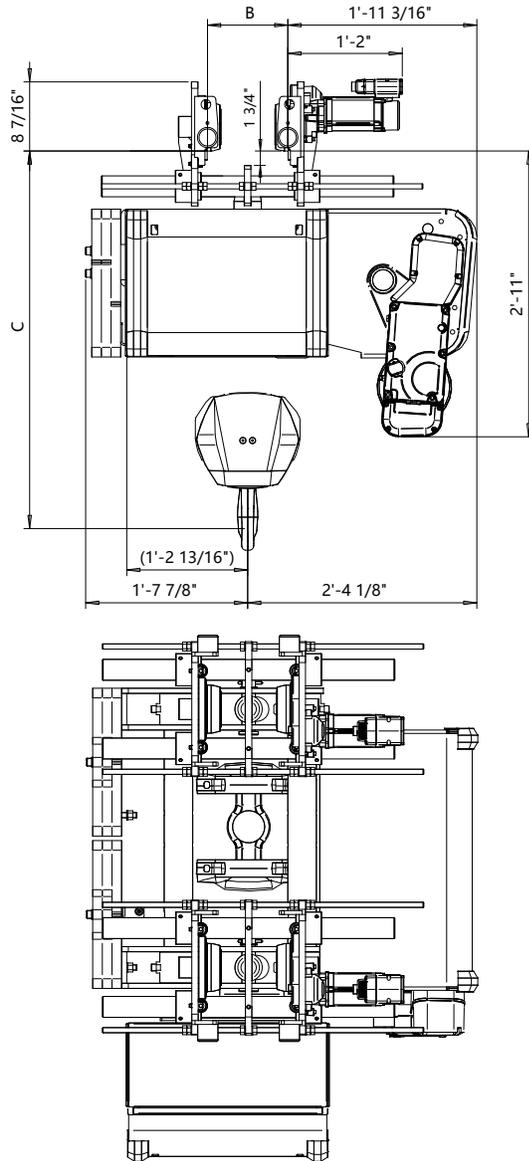

Flange Width B-dimension [inch]	Headroom C-Dimension				
	Case 1 [inch]	Case 2 [inch]	Case 3 [inch]	Case 4 [inch]	Case 5 [inch]
$4\frac{3}{4}'' - 17\frac{3}{4}''$	39"	$46\frac{1}{4}''$	$44\frac{5}{16}''$	$43\frac{1}{2}''$	$45\frac{11}{16}''$
Case 1: Steel rope without HS22 limit switch					
Case 2: Steel rope with HS22 limit switch					
Case 3: Steel rope with HS22 L.S. & Rope angle sensor					
Case 4: Synthetic rope with HS22 limit switch					
Case 5: Synthetic rope with HS22 L.S. & Rope angle sensor					
HS22 limit switch mandatory with synthetic rope					

HOL (ft-in)	Length code	H2 (inch)	L1 (inch)	Estimated Weight (lb)
29'-6"	C	$5\frac{1}{16}''$	$2\frac{7}{8}''$	2340
39'-4"	D	$6\frac{13}{16}''$	$3\frac{1}{2}''$	2440
49'-2"	E	$8\frac{5}{8}''$	$3\frac{9}{16}''$	2550

Load (ton)	Class ASME
$7\frac{1}{2}$	H4+
10	H4
$12\frac{1}{2}$	H3

Rev Explanation Date Revised by Checked by

This document is the absolute property of Demag Crane & Components Corp. This document must not be copied without the written permission of Demag Crane & Components Corp. The contents thereof must not be disclosed to a third party nor be used for any unauthorized purpose. Contravention will be prosecuted.

Design	Chd	Appd	Ref Drawing	R10-N-04
Date	NORMAL HEADROOM HOIST			
SLEOMECE Owner Dept	FOR STRAIGHT TRACK			
4 PART SINGLE				
R10041_N				
1:10				Folder
Issue				1