
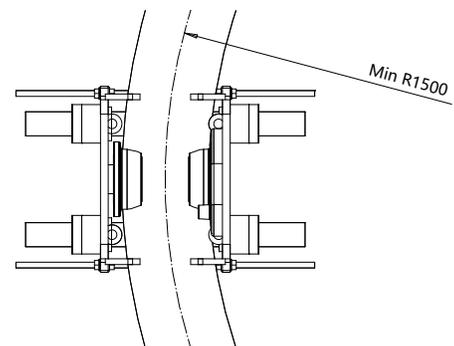
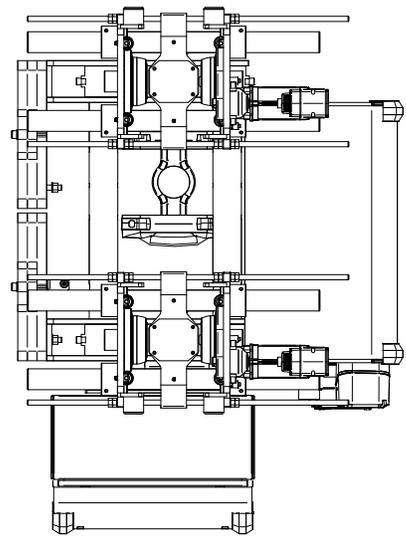
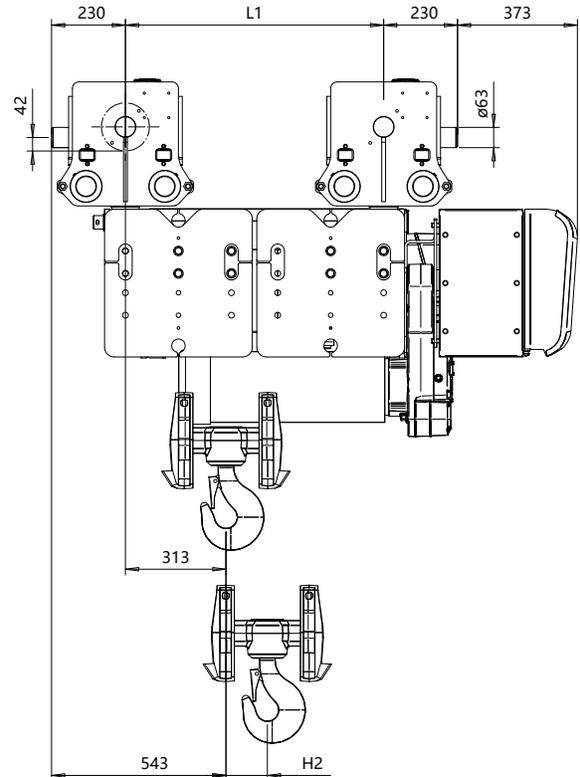


Normal Headroom - Swivel Trolley for Curved Track, 4 PART SINGLE

Hoist type:

SI

DHR10 4/1..EUD

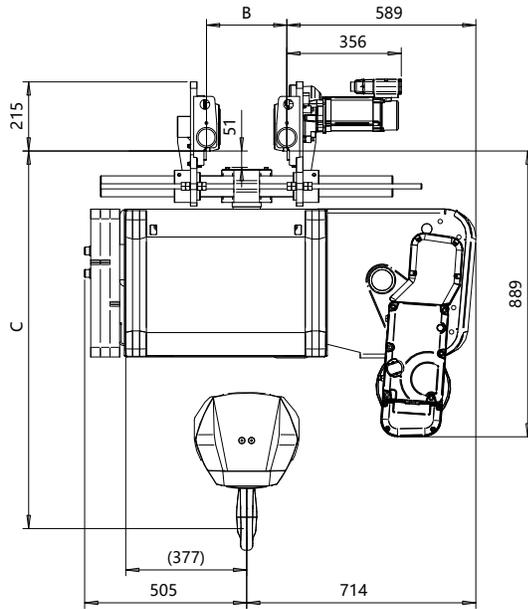

Flange Width	Headroom C-Dimension					
	B-dimension	Case 1	Case 2	Case 3	Case 4	Case 5
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
120 - 450	990	1175	1125	1105	1160	
Case 1: Steel rope without HS22 limit switch						
Case 2: Steel rope with HS22 limit switch						
Case 3: Steel rope with HS22 L.S. & Rope angle sensor						
Case 4: Synthetic rope with HS22 limit switch						
Case 5: Synthetic rope with HS22 L.S. & Rope angle sensor						
HS22 limit switch mandatory with synthetic rope						

HOL	Length	H2	L1	Estimated weight
(m)	code	(mm)	(mm)	(kg)
9	C	129	804	1102
12	D	173	977	1148
15	E	218	1164	1193

Load (kg)	Class Fem/ISO	Class ASME
8000	3m/M6	H4+
10000	2m/M5	H4
12500	1Am/M4	H3

Rev Explanation Date Revised by Checked by

This document is the absolute property of Demag Crane & Components Corp. This document must not be copied without the written permission of Demag Crane & Components Corp. The contents thereof must not be disclosed to a third party nor be used for any unauthorized purpose. Contravention will be prosecuted.

Design	Chd	Appd	Ref Drawing	R10-U-04
Date	NORMAL HEADROOM HOIST - SWIVEL TROLLEY			1:10
SLEOMECE Owner Dept	FOR CURVED TRACK			Folder
DEMAG	4 PART SINGLE			Issue
	R10041_U			2