
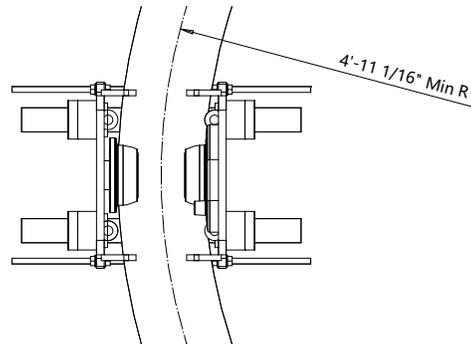
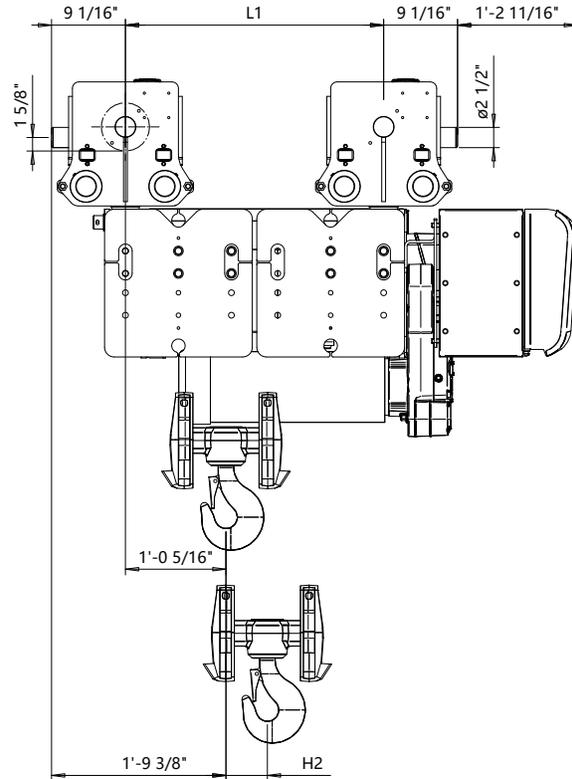


Normal Headroom - Swivel Trolley for Curved Track, 4 PART SINGLE

Hoist type:

US-60Hz

DHR10 4/1..EUD

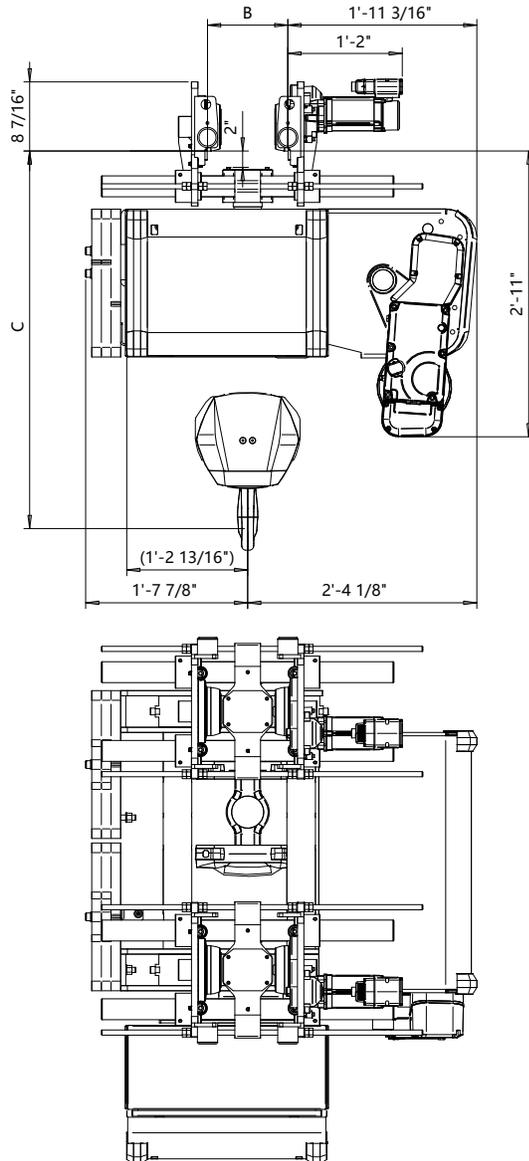

Flange Width	Headroom C-Dimension				
B-dimension	Case 1	Case 2	Case 3	Case 4	Case 5
[inch]	[inch]	[inch]	[inch]	[inch]	[inch]
4 3/4" - 17 3/4"	39"	46 1/4"	44 5/16"	43 1/2"	45 11/16"
Case 1: Steel rope without HS22 limit switch					
Case 2: Steel rope with HS22 limit switch					
Case 3: Steel rope with HS22 L.S. & Rope angle sensor					
Case 4: Synthetic rope with HS22 limit switch					
Case 5: Synthetic rope with HS22 L.S. & Rope angle sensor					
HS22 limit switch mandatory with synthetic rope					

HOL	Length	H2	L1	Estimated Weight
(ft-in)	code	(inch)	(inch)	(lb)
29'-6"	C	5 1/16"	2'-7 5/8"	2430
39'-4"	D	6 13/16"	3'-2 1/2"	2530
49'-2"	E	8 5/8"	3'-9 13/16"	2630

Load (ton)	Class ASME
7 1/2	H4+
10	H4
12 1/2	H3

Rev Explanation Date Revised by Checked by

This document is the absolute property of Demag Crane & Components Corp. This document must not be copied without the written permission of Demag Crane & Components Corp. The contents thereof must not be disclosed to a third party nor be used for any unauthorized purpose. Contravention will be prosecuted.

Design	Chd	Appd	Ref Drawing	R10-U-04
Date	NORMAL HEADROOM HOIST - SWIVEL TROLLEY			
SLEOMECE Owner Dept	FOR CURVED TRACK			
4 PART SINGLE				
R10041_U				
1:10				Folder
Issue				2

