


Double Girder - Medium, 4 PART DOUBLE
Hoist type:
DHR10 8/2..EZ

SI

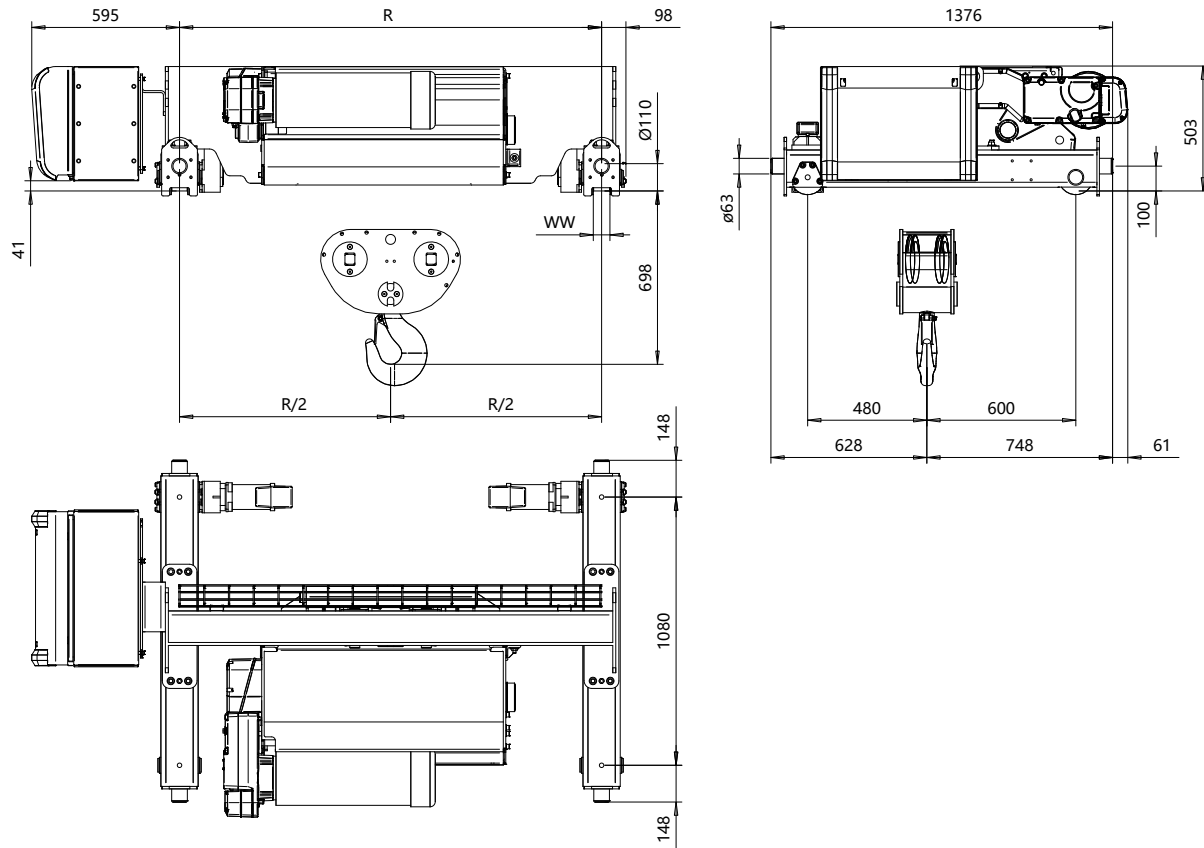

Headroom C-Dimension			Notes
Case 1	Case 2	Case 3	Case 1: Steel rope without HS22 limit switch
(mm)	(mm)	(mm)	Case 2: Steel rope with HS22 limit switch
698	698	698	Case 3: Steel rope with HS22 L.S. & Rope angle sensor

						Estimated weight *	
HOL	Length	WW min	WW max	R min	R max	R min	R max
(m)	code	(mm)	(mm)	(mm)	(mm)	(kg)	(kg)
6.5	D	52	82	1700	3100	848	980
9	E	52	82	1700	3100	880	1012
11	F	52	82	2000	3100	916	1048
14.5	G	52	82	2400	3100	1012	1093
18	H	52	82	2400	3100	1066	1148
21.5	J	52	82	2700	3100	1139	1198
26.5	K	52	82	3100	3100	1275	1275

Load	Class	Class
(kg)	Fem/ISO	ASME
5000	3m/M6	H4+
6300	3m/M6	H4+
8000	3m/M6	H4+
10000	2m/M5	H4

* Estimated weight with P5 hoist motor
Standard rail gauges are 1700 mm, 2000 mm, 2400 mm, 2700 mm, 3100 mm.
Default trolley gauge is R min.

This document is the absolute property of Demag Crane & Components Corp. This document must not be copied without the written permission of Demag Crane & Components Corp.
The contents thereof must not be disclosed to a third party nor be used for any unauthorized purpose. Contravention will be prosecuted.

Design	Chd	Appd	Ref Drawing	R10-M-24
Date	DOUBLE GIRDER HOIST			 1:10
SLEOMECE Owner Dept	4 PART DOUBLE			Folder
DEMAG				Issue 1
R10042 M				