


Double Girder - Medium, 6 PART DOUBLE
Hoist type:
DHR10 12/2..EZ

US-60Hz

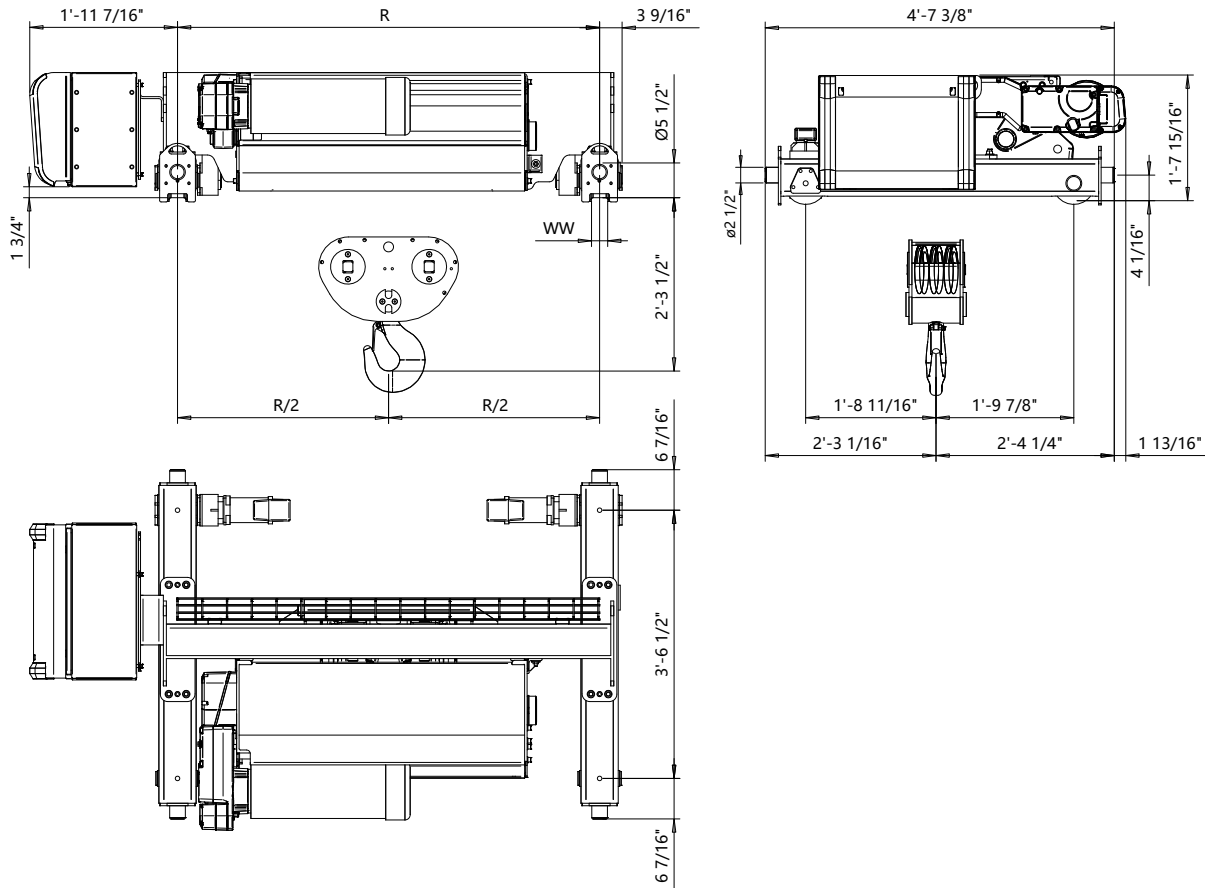

Headroom C-Dimension			Notes
Case 1 (inch)	Case 2 (inch)	Case 3 (inch)	Case 1: Steel rope without HS22 limit switch
27 1/2"	27 1/2"	27 1/2"	Case 2: Steel rope with HS22 limit switch
			Case 3: Steel rope with HS22 L.S. & Rope angle sensor

						Estimated Weight *	
HOL (ft-in)	Length code	WW min	WW max	R min	R max	R min (lb)	R max (lb)
19'-8"	E	2 1/16"	3 1/4"	5'-6 15/16"	10'-2 1/16"	2020	2320
23'-11"	F	2 1/16"	3 1/4"	6'-6 3/4"	10'-2 1/16"	2140	2390
31'-6"	G	2 1/16"	3 1/4"	7'-10 1/2"	10'-2 1/16"	2310	2490
39'-4"	H	2 1/16"	3 1/4"	7'-10 1/2"	10'-2 1/16"	2430	2610
46'-11"	J	2 1/16"	3 1/4"	8'-10 5/16"	10'-2 1/16"	2600	2730
57'-9"	K	2 1/16"	3 1/4"	10'-2 1/16"	10'-2 1/16"	2890	2890

* Estimated weight with P5 hoist motor
Standard rail gauges are 5'-6 15/16", 6'-6 3/4", 7'-10 1/2", 8'-10 5/16", 10'-2 1/16".
Default trolley gauge is R min.

Load (ton)	Class
12	H4+
15	H4

Design		Chd	Appd	Ref Drawing	R10-M-26
Date		DOUBLE GIRDER HOIST			1:10
SLEQMECE Owner Dept		6 PART DOUBLE			Folder
DEMAG		R10062_M			Issue 2

This document is the absolute property of Demag Crane & Components Corp. This document must not be copied without the written permission of Demag Crane & Components Corp.
The contents thereof must not be disclosed to a third party nor be used for any unauthorized purpose. Contravention will be prosecuted.