
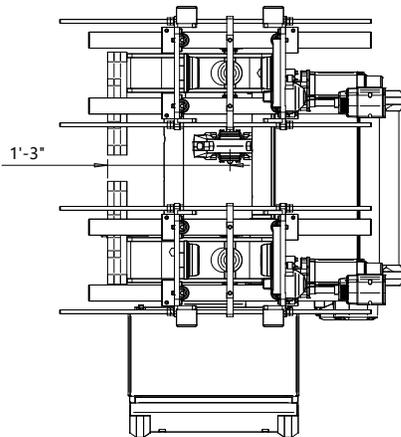
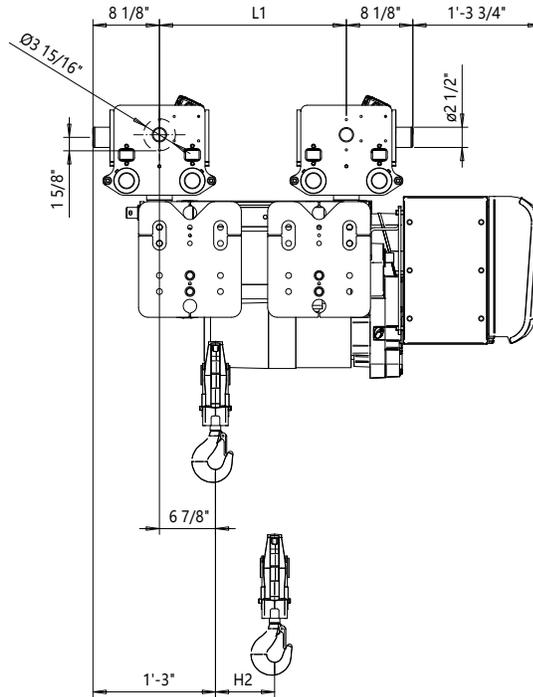


Normal Headroom - for Straight Track, 2 PART SINGLE
Hoist type:

US-60Hz

DHR5 2/1..EU

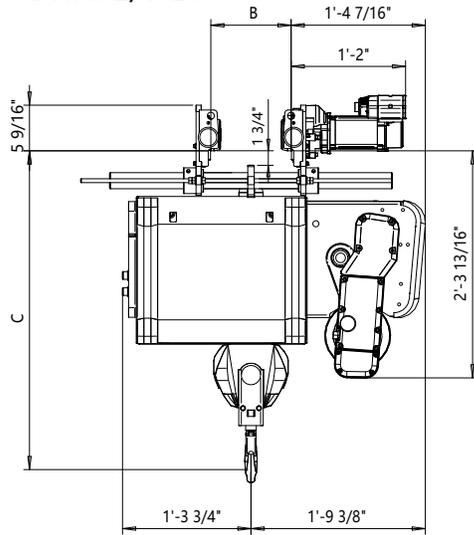

Flange Width	Headroom C-Dimension				
	Case 1	Case 2	Case 3	Case 4	Case 5
B-dimension					
[inch]	[inch]	[inch]	[inch]	[inch]	[inch]
4" - 17 3/4"	33 3/4"	39 1/16"	41 1/2"	34 3/8"	38 1/2"
Case 1: Steel rope without HS22 limit switch					
Case 2: Steel rope with HS22 limit switch					
Case 3: Steel rope with HS22 L.S. & Rope angle sensor					
Case 4: Synthetic rope with HS22 limit switch					
Case 5: Synthetic rope with HS22 L.S. & Rope angle sensor					
HS22 limit switch mandatory with synthetic rope					

HOL	Length	H2	L1	Estimated Weight
(ft-in)	code	(inch)	(inch)	(lb)
42'-8"	B	7 1/4"	1'-10 15/16"	1040
59'-0"	C	11"	2'-5"	1100
78'-8"	D	14 1/2"	3'-0 1/8"	1130

Load	Class
(ton)	ASME
1 1/2	H4+
2	H4+
2 1/2	H4
3	H3

Rev Explanation Date Revised by Checked by

This document is the absolute property of Demag Crane & Components Corp. This document must not be copied without the written permission of Demag Crane & Components Corp. The contents thereof must not be disclosed to a third party nor be used for any unauthorized purpose. Contravention will be prosecuted.

Design	Chd	Appd	Ref Drawing	R5-N-02
Date	NORMAL HEADROOM HOIST			
SLEOMECE Owner Dept	FOR STRAIGHT TRACK			
2 PART SINGLE				
R5021_N				
Folder				1:10
Issue				1

