
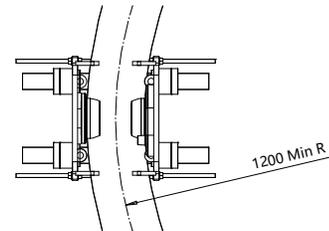
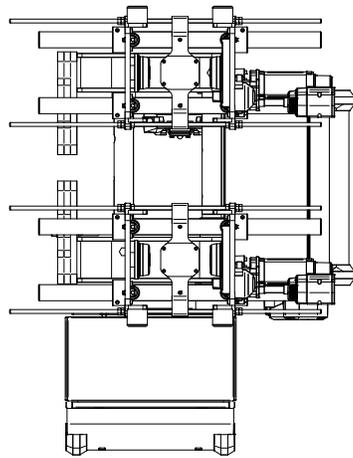
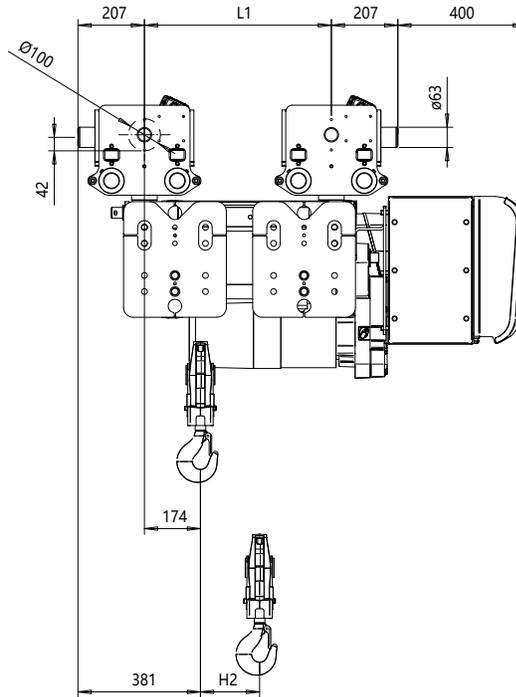


Normal Headroom - Swivel Trolley for Curved Track, 2 PART SINGLE

Hoist type:

SI

DHR5 2/1..EUD

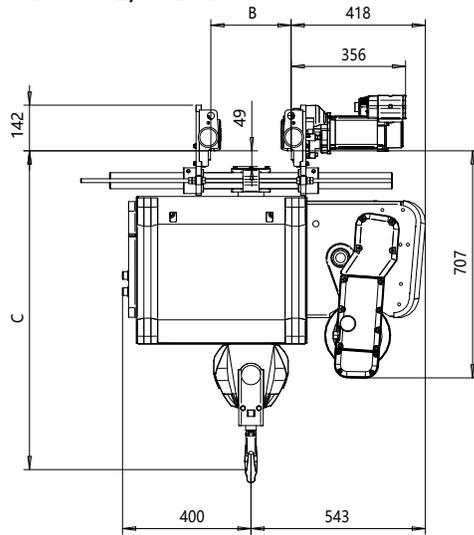

Flange Width	Headroom C-Dimension				
	Case 1	Case 2	Case 3	Case 4	Case 5
B-dimension					
[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
100 - 450	857	992	1052	872	977
Case 1: Steel rope without HS22 limit switch					
Case 2: Steel rope with HS22 limit switch					
Case 3: Steel rope with HS22 L.S. & Rope angle sensor					
Case 4: Synthetic rope with HS22 limit switch					
Case 5: Synthetic rope with HS22 L.S. & Rope angle sensor					
HS22 limit switch mandatory with synthetic rope					

Load (kg)	Class Fem/ISO	Class ASME
1600	3m/M6	H4+
2000	3m/M6	H4+
2500	2m/M5	H4
3200	1Am/M4	H3

HOL (m)	Length code	H2 (mm)	L1 (mm)	Estimated weight (kg)
13	B	184	582	490
18	C	276	734	517
24	D	368	918	526

Design	Chd	Appd	Ref Drawing	R5-U-02
Date	NORMAL HEADROOM HOIST - SWIVEL TROLLEY			1:10
SLEOMECE Owner Dept	FOR CURVED TRACK			Folder
2 PART SINGLE				Issue
R5021_U				2

Rev Explanation Date Revised by Checked by

This document is the absolute property of Demag Crane & Components Corp. This document must not be copied without the written permission of Demag Crane & Components Corp. The contents thereof must not be disclosed to a third party nor be used for any unauthorized purpose. Contravention will be prosecuted.

