
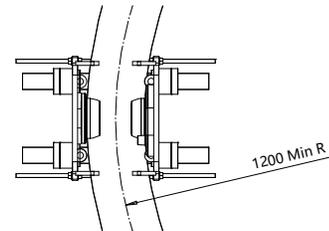
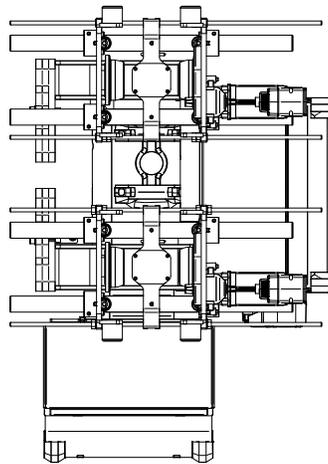
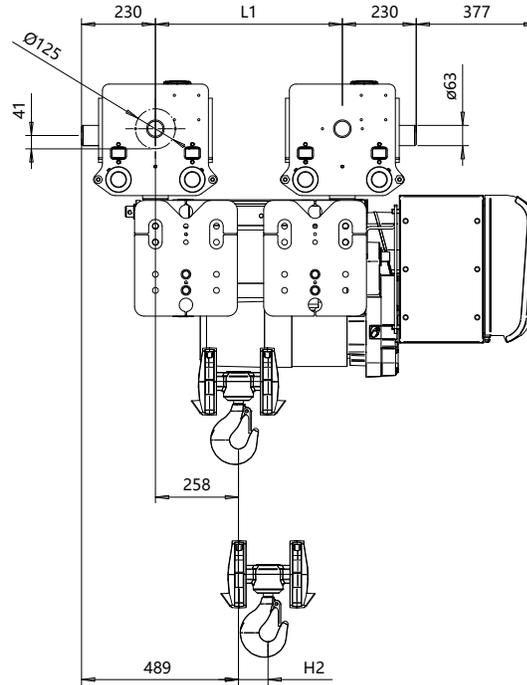


# Normal Headroom - Swivel Trolley for Curved Track, 4 PART SINGLE

## Hoist type:

SI

DHR5 4/1..EUD

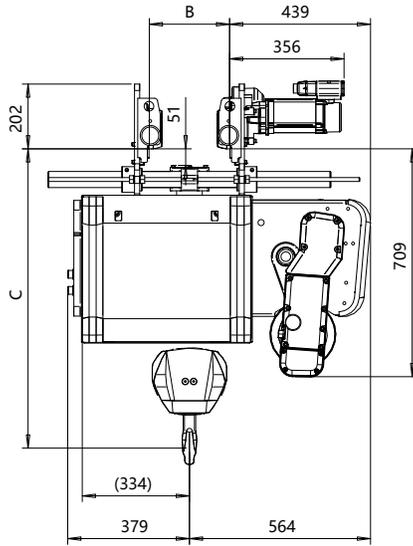

Flange Width	Headroom C-Dimension				
	Case 1	Case 2	Case 3	Case 4	Case 5
B-dimension					
[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
100 - 450	754	934	994	824	919
Case 1: Steel rope without HS22 limit switch					
Case 2: Steel rope with HS22 limit switch					
Case 3: Steel rope with HS22 L.S. & Rope angle sensor					
Case 4: Synthetic rope with HS22 limit switch					
Case 5: Synthetic rope with HS22 L.S. & Rope angle sensor					
HS22 limit switch mandatory with synthetic rope					

Load (kg)	Class Fem/ISO	Class ASME
3200	3m/M6	H4+
4000	3m/M6	H4+
5000	2m/M5	H4
6300	1Am/M4	H3

HOL (m)	Length code	H2 (mm)	L1 (mm)	Estimated weight (kg)
6.5	B	92	582	495
9	C	138	734	526
12	D	184	918	537

Rev Explanation Date Revised by Checked by

This document is the absolute property of Demag Crane & Components Corp. This document must not be copied without the written permission of Demag Crane & Components Corp. The contents thereof must not be disclosed to a third party nor be used for any unauthorized purpose. Contravention will be prosecuted.

Design	Chd	Appd	Ref Drawing	R5-U-04
Date	NORMAL HEADROOM HOIST - SWIVEL TROLLEY			1:10
SLEOMECE Owner Dept	FOR CURVED TRACK			Folder
4 PART SINGLE				Issue
R5041_U				2