


DHT10 UNDER RUNNING END TRUCK

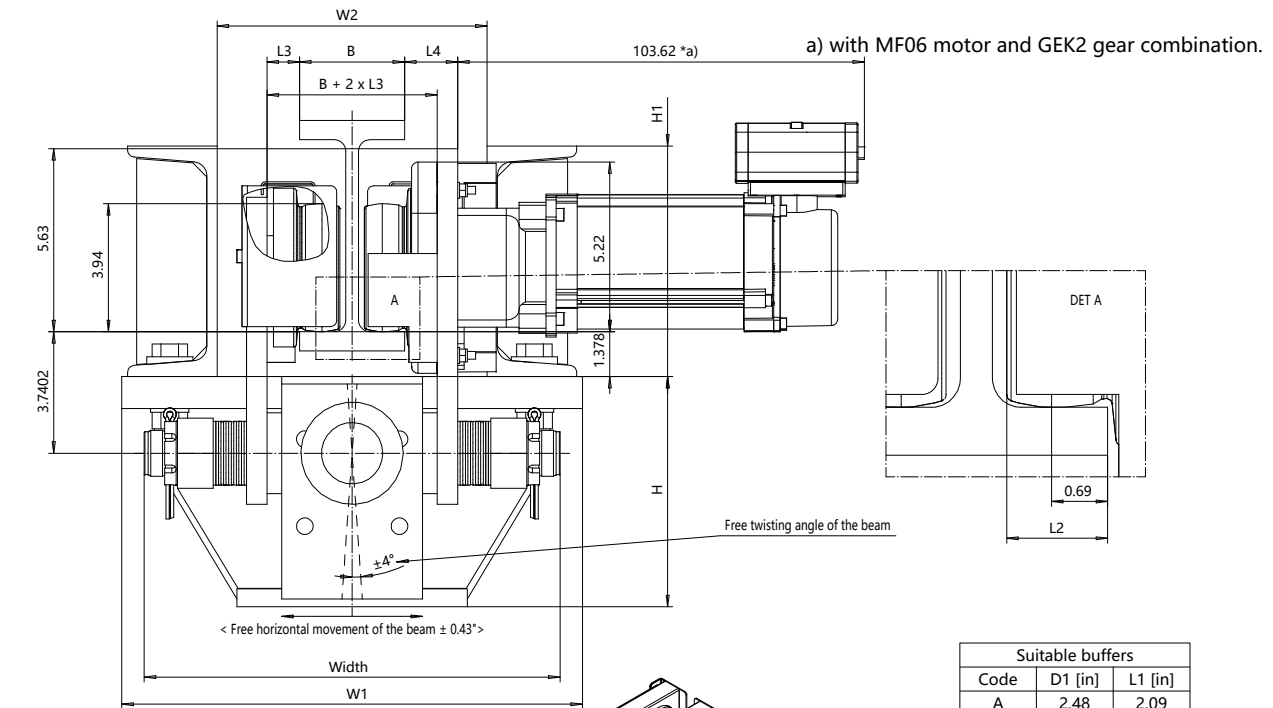

Suitable buffers		
Code	D1 [in]	L1 [in]
A	2.48	2.09
B	3.15	2.68
C	3.94	3.35
K	3.15	3.15
G	3.94	3.94
E	3.94	5.91
A, B, C: Rubber		
K, G, E: Polyurethane		

FLANGE RANGE (B) DIMENSIONS							
Wheels	B [in]	L2 [in]	L3 [in]	L4 [in]	Width [in]	W1 [in]	W2 [in]
Normal	3.23...5.12	1.24	1	1.63	12.8	14.17	8.31
Normal	5.16...7.0	1.24	1	1.63	14.69	14.17	8.31
Normal	7.05...8.9	1.24	1	1.63	16.57	19.88	14.02
Normal	8.94...10.79	1.24	1	1.63	18.46	19.88	14.02
Normal	10.83...12.6	1.24	1	1.63	20.35	19.88	14.02
Patented	2.4...4.29	0.83	1.42	2.05	12.8	14.17	8.31
Patented	4.33...6.18	0.83	1.42	2.05	14.69	14.17	8.31

WHEELBASE	Max dyn corner load [lb]	L [in]	L5 [in]	Weight [lb]	H [in]	H1 [in]
55 1/8" (1400 mm)	10350	70 1/4"	17 3/8"	628	7.09	7.09
70 7/8" (1800 mm)	10350	86 1/4"	33 1/16"	672	7.09	7.09
90 9/16" (2300 mm)	10350	106"	52 3/4"	727	7.09	7.09
110 1/4" (2800 mm)	10350	125 5/8"	72 1/2"	816	7.09	7.87

This document is the absolute property of Demag Crane & Components Corp.
This document must not be copied without the written permission of Demag Crane & Components Corp.
The contents thereof must not be disclosed to a third party nor be used for any unauthorized purpose. Contravention will be prosecuted.

ETTAJA Design	ETTRSI Chd	ETTRSI Appd	ETTRSI Ref Drawing	UR10
2007-06-28 Date	END CARRIAGE			1 - 6.5
SLEGDOCV Owner Dept	DHT10			Folder UR/PR
DEMAG	D005016-A			Issue 8/2025