


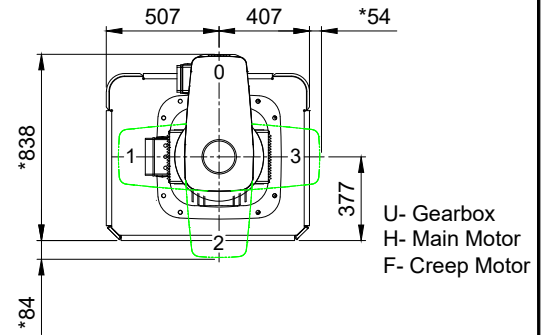


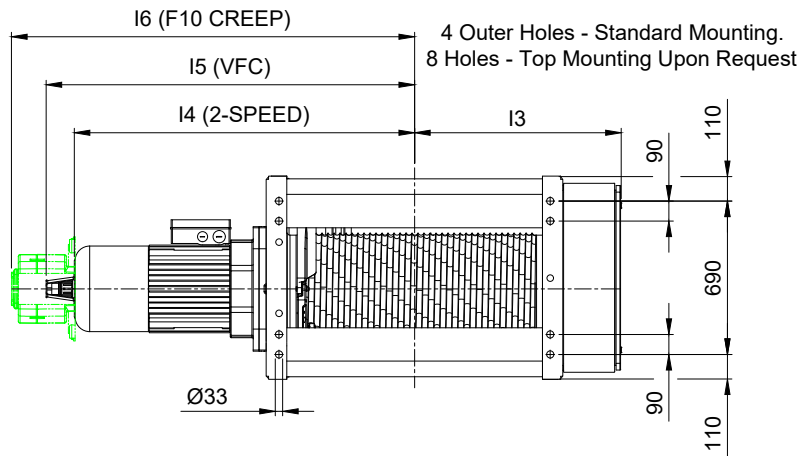

Position Code 0-1-2-3 When Looking at Motor End Face- Gearbox & Motor Terminals Boxes
* Worst Case F10 V3 Drive

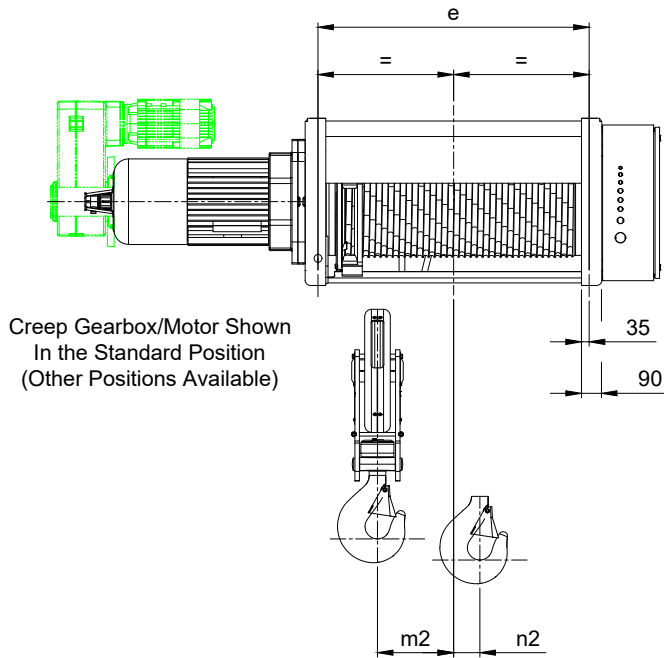

Lateral Bore Holes upon Request.

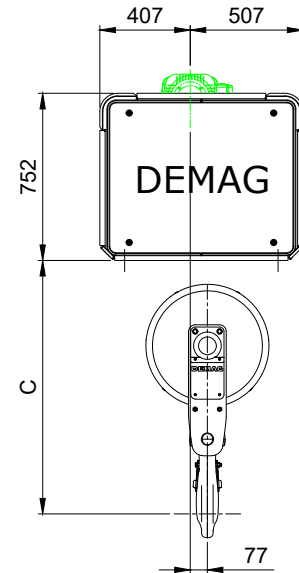

Hoist Frame	Drum	HOL (m)	m2 (mm)	n2 (mm)	e (mm)	I3 (mm)	I4* (mm)	I5* (mm)	I6* (mm)
DH2000	H18	18	187	118	910	772	1274	1499	1655
	H27	27	342	118	1220	927	1429	1654	1810
	H47	47	682	118	1900	1267	1769	1994	2150

* Based Off V3 Max Speed - Smaller for V1 & V2 Speeds

Reeving	2/1
Units	(mm)
Rope Dia	25
Drum Dia	508
Pitch	27

Load (Kg)	FEM	Hoist
10000	4m	DH2050
12500	3m	DH2063
16000	2m	DH2080
20000	1Am	DH2100
25000	1Bm	DH2125

Dim "C" →	with Overload	without Overload
Size	(mm)	(mm)
DH2125-2080	1140	Note 1
DH2050-2063	1260	Note 2

Note 1: +170 mm for Hook Operated Limit Sw itch

Note 2: +150 mm for Hook Operated Limit Sw itch

Hoist Speed	Approx Weight (kg)					
	Drum H18		Drum H27		Drum H47	
	DH2125-2080	DH2050-2063	DH2125-2080	DH2050-2063	DH2125-2080	DH2050-2063
2-Speed	1450	1475	1640	1665	2020	2045
VFC	1456	1481	1646	1671	2026	2051
F10 Creep	1764	1779	1954	1979	2329	2359

* Based Off V3 Max Speed - Less for V1 & V2 Speeds

Date	Name	Description
06.04.26	C.BLACK	FOOT-SIDE-TOP MOUNTED DH2000 FRAME
Scale: 1:34	Type	REV
Dept. 270	DH2000 - 2/1 (METRIC UNITS)	00

Property of Demag Cranes & Components Corporation This print or drawing must not be copied without the written permission of Demag Cranes & Components Corporation.

The Contents thereof must not be disclosed to a third party nor be used for any unauthorized purpose. Contravention will be prosecuted.

DEMAG

Committed to Performance
6001 Cochran Road Suite 402, Solon, Ohio 44139
http://www.demagcranes.us.com