


This document is the absolute property of Demag Crane & Components Corp. This document must not be copied without the written permission of Demag Crane & Components Corp. The contents thereof must not be disclosed to a third party nor be used for any unauthorized purpose. Contravention will be prosecuted.

# DFO32 END TRUCK SIDE JOINT PLATE TYPE Q

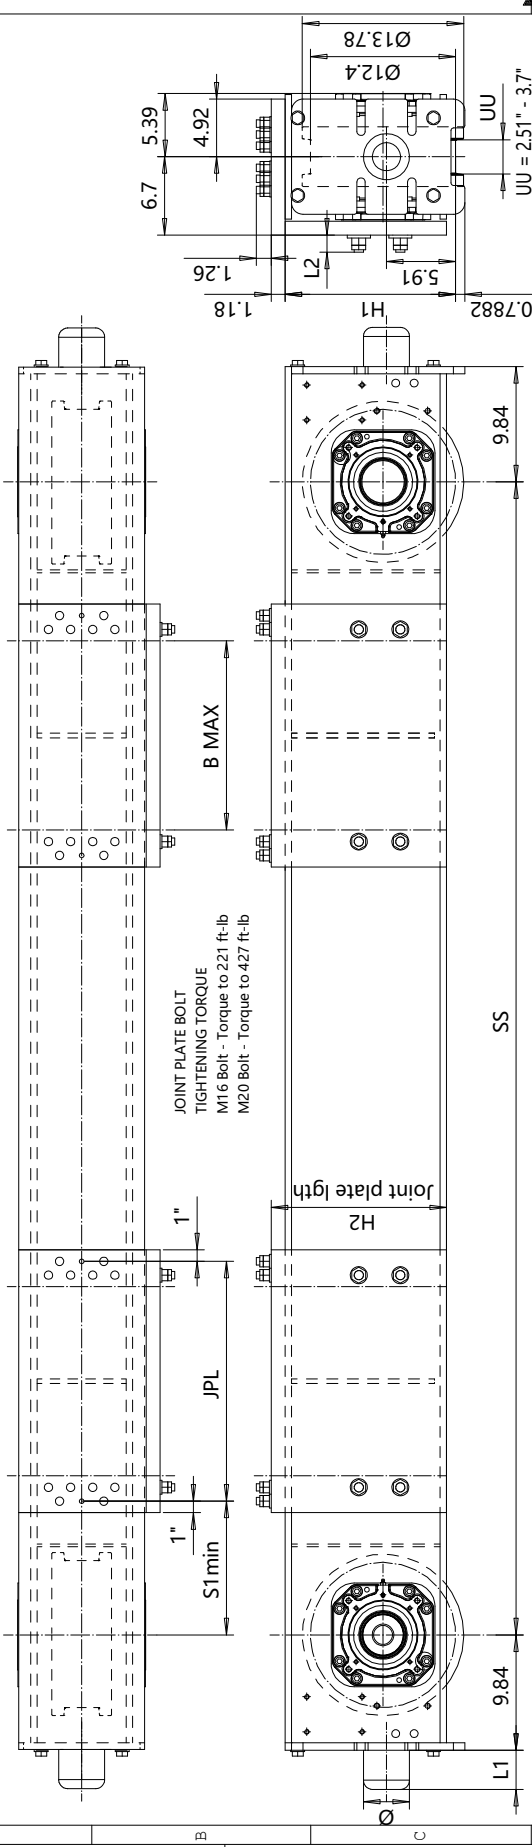

Wheelbase code	SS	Max dyn whl load, (kip)	Perm dyn whl load, (kip)	ASCE 85	BETH 135	SG	DG	Approx. Wt./Trk, lb	H1	H2	L2	S1 min
25	8'-2 7/16"	56.93	37.5	37.5	49.3	1786	2273	14 9/16"	15"	1 1/2"	1 1/2"	12.20"
32	10'-4"	56.93	37.5	37.5	49.3	1973	2460	14 9/16"	15"	1 1/2"	1 1/2"	12.20"
40	13'-1 1/2"	46.8	37.5	37.5	49.3	2180	2668	18 1/2"	18 7/8"	2"	2"	13.78"
45	14'-9 1/8"	41.63	37.5	37.5	49.3	2304	2791	18 1/2"	18 7/8"	2"	2"	13.78"
50	16'-4 7/8"	45	37.5	37.5	49.3	2588	3075	21 1/2"	18 7/8"	2"	2"	13.78"
55	18'-1/2"	40.95	37.5	37.5	49.3	2723	3210	21 1/2"	18 7/8"	2"	2"	13.78"

The wheel loads listed are only a guideline. The max. wheel load listed is based on the structural integrity of the frame and load placement, and it does not take into account permissible wheel loading or bearing life. SG load placement is at the center, and DG load placement is for a trolley gauge of 1400 mm (55 1/8"). The permissible dynamic wheel load listed is based on assumptions that the bridge speed is 40 m/min (130 fpm), and truck duty is Fem 2m, and the runway rail as listed. The actual wheel load should not exceed the permissible wheel load. If the permissible dynamic wheel load is greater than the maximum dyn wheel load, then the actual wheel load cannot exceed maximum dyn wheel load.  
 Dyn wheel load = 1.15 x static wheel load.

Product Code example  
**DFO32-2574-Q40880C0000-N**

- N=standard, E=Special
- primer paint, color code (not in use)
- Buffer type
- Joint plate distance, mm (DG)
- Joint plate code
- = 1WD, D = 2WD (per truck)
- Wheel groove = UU, mm
- Wheel base = SS, mm
- = std, C = asymmetrical joint
- Type of end carriage

Joint plate	JPL	B max	Wheelbase code
Q4	20.47"	16.14"	25-32
Q5	24.80"	20.47"	25-32
Q6	24.80"	20.47"	40-55
Q7	33.46"	29.13"	25-32
Q8	33.46"	29.13"	40-55
Q9	43.31"	38.98"	25-32
Q0	43.31"	38.98"	40-55

Buffer type	L1	L2	H1	H2	UU
B	2 11/16"	3 3/16"	3 3/16"	3 3/16"	3 3/16"
C	3 5/16"	3 15/16"	3 15/16"	3 15/16"	3 15/16"
D	4 1/8"	4 15/16"	4 15/16"	4 15/16"	4 15/16"
E	5 15/16"	3 15/16"	3 15/16"	3 15/16"	3 15/16"
F	7 1/2"	4 15/16"	4 15/16"	4 15/16"	4 15/16"
H	6 5/16"	6 5/16"	6 5/16"	6 5/16"	6 5/16"
I	7 7/8"	7 7/8"	7 7/8"	7 7/8"	7 7/8"
M	4 15/16"	4 15/16"	4 15/16"	4 15/16"	4 15/16"
P	9 7/16"	6 5/16"	6 5/16"	6 5/16"	6 5/16"
S	11 13/16"	7 7/8"	7 7/8"	7 7/8"	7 7/8"
T	13 3/4"	9 7/8"	9 7/8"	9 7/8"	9 7/8"
Y	18 3/4"	9 7/8"	9 7/8"	9 7/8"	9 7/8"

B, C, D rubber  
 K, G, E, F, H, I, M, P, S polyurethane

No.	Description	Specification	Id	Drawing
ETTPA	Design	ETTPA		
2008-08-11	Design Date	END TRUCK		
SLEDOCV	Design	OUTLINE DRAWING		
DFO32-Q	Design	DFO32-Q		
DFO32	Design	DFO32		
1.7	Design	DFO32		
08/2025	Design	DFO32		



DFO32 END TRUCK SIDE JOINT