
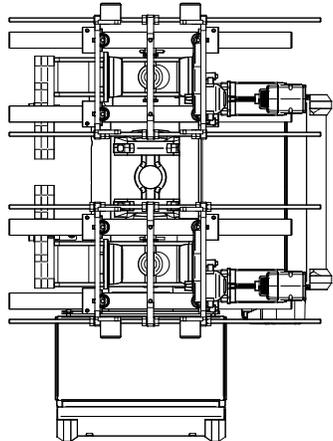
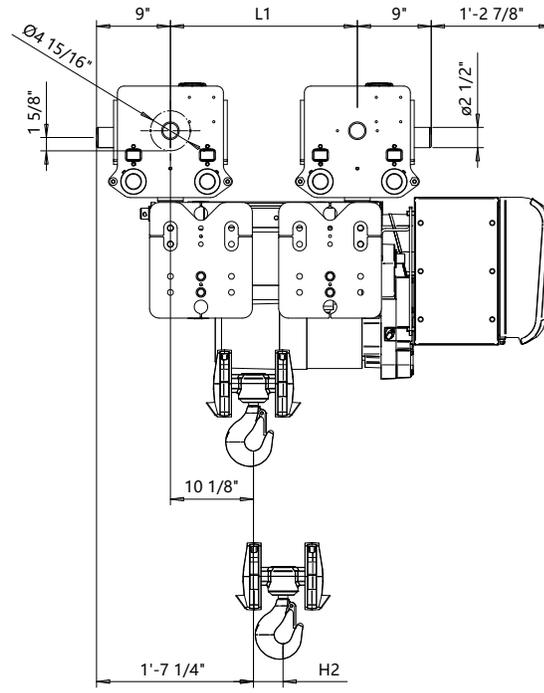


Normal Headroom - for Straight Track, 4 PART SINGLE
Hoist type:

US-60Hz

DHR5 4/1..EU

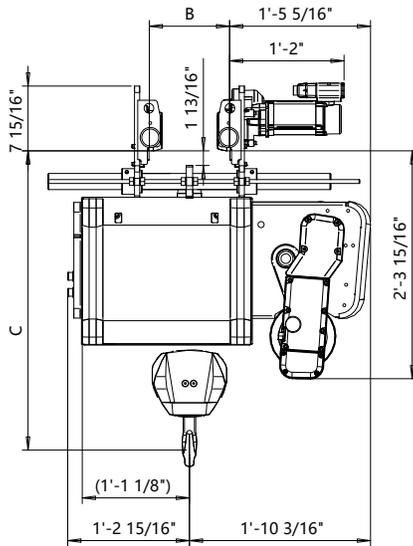

Flange Width B-dimension [inch]	Headroom C-Dimension				
	Case 1	Case 2	Case 3	Case 4	Case 5
4" - 17 3/4"	29 11/16"	36 3/4"	39 1/8"	32 1/2"	36 1/4"
Case 1: Steel rope without HS22 limit switch					
Case 2: Steel rope with HS22 limit switch					
Case 3: Steel rope with HS22 L.S. & Rope angle sensor					
Case 4: Synthetic rope with HS22 limit switch					
Case 5: Synthetic rope with HS22 L.S. & Rope angle sensor					
HS22 limit switch mandatory with synthetic rope					

Load (ton)	Class ASME
3	H4+
4	H4+
5	H4
6	H3

HOL (ft-in)	Length code	H2 (inch)	L1 (inch)	Estimated Weight (lb)
21'-4"	B	3 5/8"	1'-10 15/16"	1060
29'-6"	C	5 1/2"	2'-5"	1120
39'-4"	D	7 1/4"	3'-0 1/8"	1150

Rev Explanation Date Revised by Checked by
This document is the absolute property of Demag Crane & Components Corp. This document must not be copied without the written permission of Demag Crane & Components Corp. The contents thereof must not be disclosed to a third party nor be used for any unauthorized purpose. Contravention will be prosecuted.

Design	Chd	Appd	Ref Drawing	R5-N-04
Date	NORMAL HEADROOM HOIST			1:10
SLEOMECE Owner Dept	FOR STRAIGHT TRACK			Folder
DEMAG	4 PART SINGLE			Issue
R5041_N				1